


KHAMON

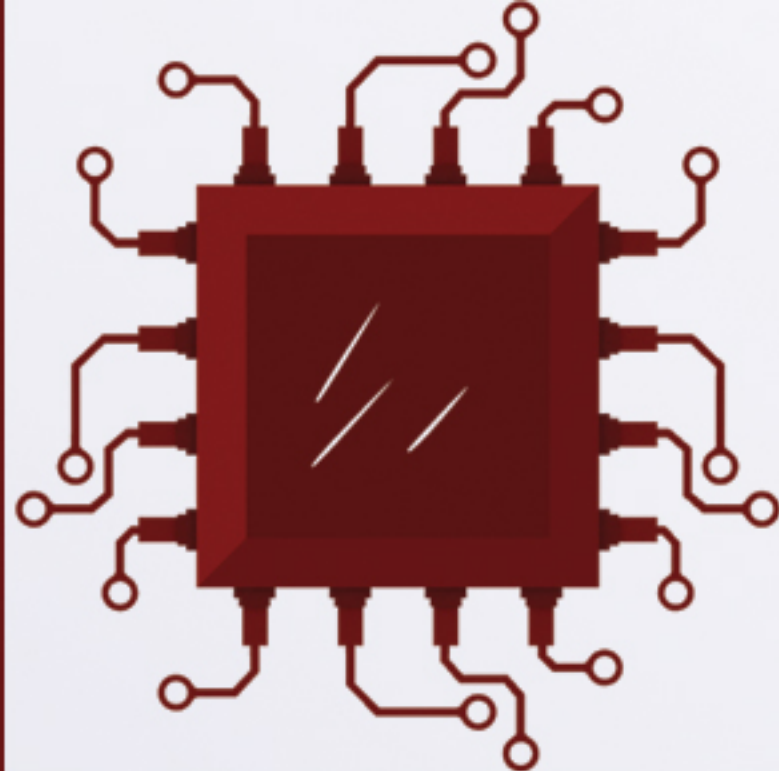

INFORMATION DISPLAYS

INFORMATION DISPLAY (D_I_8_100)

07



DISPLAY WITH KEYBOARD



Displaying characters: **100mm segments in two rows, red colour LED**

Material: **eloxed aluminum, plexiglass, stickers with text**

Setting: **through four binary inputs**

- 1. input: **set the value of 'Output' to zero**

- 2. input: **adds 1 to the value of 'Output'**

- 3. input: **adds 10 to the value of 'Target'**

- 4. input: **subtracts 10 from the value of 'Target'**

Size: **800 x 450 x 45 mm**

Power supply: **230V AC through adapter**

Operating temperature: **-20 + 50 [°C]**

Mounting: **on wall**

Displaying characters: **200mm, red colour outdoor LED (110x50)**

Material: **eloxed aluminium, plexiglass, suitable for indoor/outdoor use**

Size: **500 x 230 x 30 mm**

Power supply: **230 V AC through adapter**

Hőmérsékleti tartomány: **-20 + 50 [°C]**

Mounting: **on wall**

Communication: **by RS485, displays are addressable**

Description: **the number typed into the keyboard is shown on the display; it can be set through a relay modul, as well**

Displaying characters: **25mm red LED segments**

Material: **IP20 case, the device fits into a panel**

Size: **48 x 48 mm, 70 mm**

Power supply: **10 - 35 V**

Operating temperature: **-5 + 50 [°C]**

Description: **can be set by code BCD, can be used as replacement in Samsung automats**

TWO CHARACTER DISPLAY

